



工業用方桶利用四只圓桶的空間貯存五只桶的液體,節省地方及方便運送, 產品由HDPE塑膠制造,外面由鍍鋅鐵保護,經多項壓力及機械測試合格,美觀實用.

AGENT:
WAN KAU ENGINEERING SERVICES LTD.
TEL.: + 852 247 53468 FAX.: + 852 2675 9616
E MAIL: wankau@gmail.com

Packaging - Specification


Container for transport

**MX 1000 UN / DN150 FPM-g., G2-Plug with
vent / scr. Ball-valve, FPM-g./ 2 label plates /
Galvanized-steel framepallet**

+ 852 2475 3468

Date: 30.08.2006 / TE-KO / ss
Page 1 of 2

Article - no.: 4004382

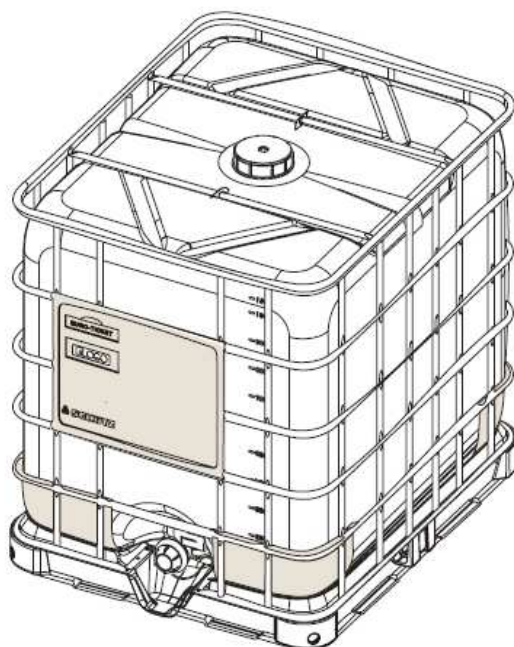

Technical data:

Nominal Capacity:	1000	Litre
Brimful Capacity:	1060	Litre
Length:	1200	mm
Width:	1000	mm
Height with pallet	1160	mm
Filling opening	150	mm
Discharge opening	50	mm
Fork Opening	100	mm
Weight Inner container:	15,5	Kg
Total approx:	60,0	Kg

Technical subjects to change, all dimensions approximately

Packaging - Specification

Container for transport

MX 1000 UN / DN150 FPM-g., G2-Plug with
vent / scr. Ball-valve, FPM-g./ 2 label plates /
Galvanized-steel framepallet

+ 852 2475 3468

Date: 30.08.2006 / TE-KO / ss
Page 2 of 2

Article - no.: 4004382

Construction

Outlet Containe Rectangular grid box made of tubular steel material, with bottom plate, connected on top with tie-bar (assembled with brackets), label plate on the front side, additional label plate on the back side.

Material : Grid / Bottom plate : Galvanized steel
Corner Protector: 4 Pieces made of PE-HD

Inner Container Rectangular blow molded tank of high density polyethylene, with filling opening in the middle of the top section.
Discharge opening at the bottom of the front side.

Material : PE-HD, natural

Filling Opening: DN150 with external thread, closed screw cap, G2-plug with vent, sealing-cap and gasket.

Material : Screw cap DN150: PE-HD. Red
O-ring gasket: FPM
G2-plug: PP
O-ring G2-plug: EBA, natural
Vent: Silicone-Caoutchous

Discharge Opening: Screwable ball-valve DN 50 with grey handle and safety guard, Outlet sealed with an PE-line Alu-film. Valve closed screw cap, PE-disk and flat-gasket Outlet nozzle enclosed.

Material : Ball-valve housing: PE-HD, black
Flat-gasket: FPM
Ball-gasket: FPM
Screw cap DN50: PE-HD, black
Flat-screw cap: PE, foam
PE-disk: PE-HD, red
Outlet nozzle: PE-HD, natural

Pallet: Steel-frampallet (1000 x 1200 mm), 4-way entry

Material : Galvanized Steel

Heavy metals: Concentration level of heavy metals (Pb, Cd, Cr VI and Hg) in packaging does not exceed 100ppm

Delivery: Ready for filling

Technical subjects to change, all dimensions approximately